



# Thermal Temperature Monitoring for Hospitality

## Highlights:

Hotels have multiple points of entry, from the main lobby to restaurant areas to parking lots. The temperature monitoring solution provides a seamless, time-efficient way to assess potential high temperatures of large groups of people without disrupting the normal flow of operations.

## Key Benefits:

Thanks to these features, users can set up effective temperature monitoring stations that can be strategically placed in multiple areas with high foot traffic. This makes it easy to identify potential risks and manage the situation proactively.

### High efficiency

Built-in AI algorithm allows monitoring of up to 30 people simultaneously

### Flexible

Can be used in any environment where a large group of people congregate or pass through

### Contact-free


Measure temperature from up to 15 feet away and reduce risk of transmission

### Search and Storage

Easily store and search alarm data

### Customizable

Set a threshold for temperature assessments and receive alerts automatically



#### BRANCHES:

**ADDRESS:**  
2342 Shattuck Ave. Suite 866  
Berkeley, CA 94704  
**PHONE:** (415) 874-7979

**ADDRESS:**  
3565 South Las Vegas Blvd.  
Las Vegas, NV 89109  
**PHONE:** (702) 333-4522

**ADDRESS:**  
244 Madison Ave.  
New York, NY 10016  
**PHONE:** (646) 540-7337

**WEBSITE:** [asithermal.com](http://asithermal.com)

**EMAIL:** [info@asithermal.com](mailto:info@asithermal.com)



Scenario:




Hotel Entrances & Lobby Area



Elevator

Entrance

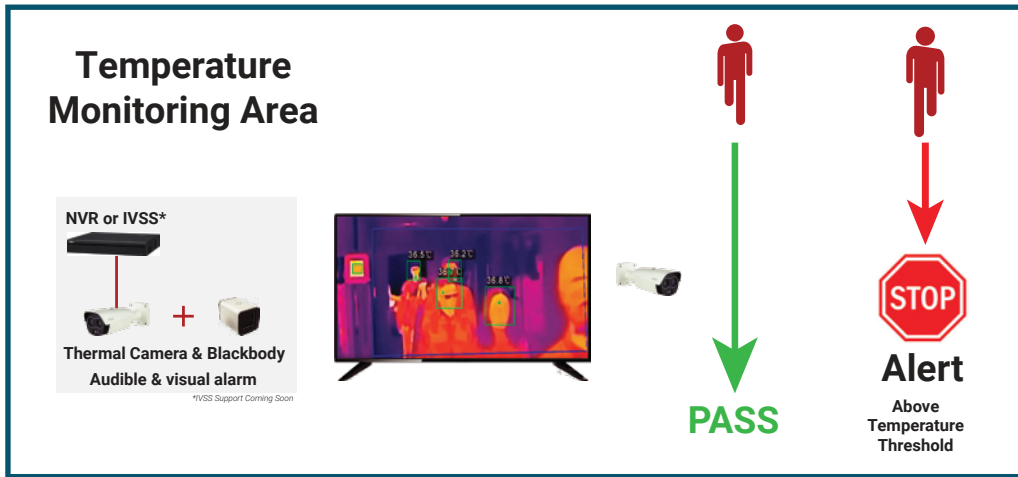

Interoperability with 3rd Party Solutions

Dahua thermal alarm functions are currently supported with third-party technology partners including Axxon, Genetec, Milestone, and Qognify,\* with more integrations coming in the future. Thermal temperature monitoring supports ONVIF Profiles S, G, and T, enabling the thermal camera to work with any ONVIF-supported partner.



\*Customized firmware's are required to work with 3rd party partners.

Thermal Products



DH-TPC-BF5421-T  
Hybrid thermal camera



JQ-D70Z  
Blackbody Temperature Calibration Device



DHI-NVR5216-16P-I 4TB  
16-Channel 1 U 16 PoE NVR

Accessories



Camera PSU  
DH-PFM320D-US DC12V 2A  
DH-PFM321D-US DC12V 1A



RQW026-00  
Connector (x2)



DHI-LM43-F200  
Monitor (x1)



VCT-999  
Tripod (x2)