



Thermal Temperature Monitoring for Industrial Businesses

Key Benefits:

<p>High Efficiency Monitor human temperatures for up to 30 people simultaneously</p>	<p>Contact Free Monitor from up to 15 feet away and reduce risk of transmission</p>	<p>Customizable Set a threshold for temperature assessments and receive alerts automatically</p>
<p>Flexible Can be used in any environment where a large group of people congregate or pass through</p>	<p>Search & Storage Easily store and search alarm data</p>	<p>Accurate $\pm 0.3^{\circ}\text{C}$ ($\pm 0.54^{\circ}\text{F}$) Temperature Measurement (with blackbody)</p>

Scenario:



BRANCHES:

ADDRESS:
2342 Shattuck Ave. Suite 866
Berkeley, CA 94704
PHONE: (415) 874-7979

ADDRESS:
244 Madison Ave.
New York, NY 10016
PHONE: (646) 540-7337


ADDRESS:
3565 South Las Vegas Blvd.
Las Vegas, NV 89109
PHONE: (702) 333-4522

WEBSITE: asithermal.com
EMAIL: info@asithermal.com

OUR PARTNERS:



Solution Design

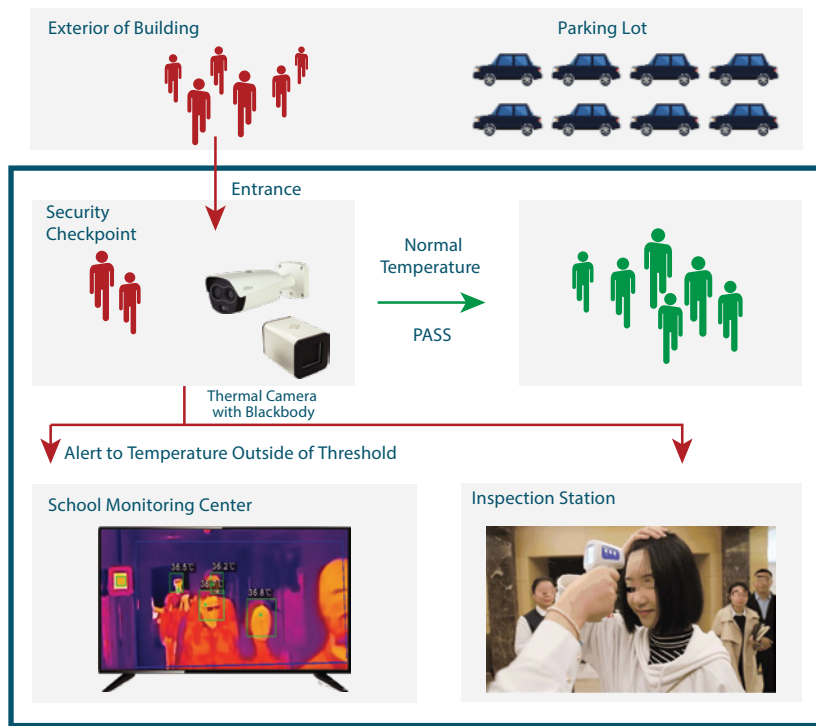


Interoperability with 3rd Party Solutions

Dahua thermal alarm functions are currently supported with third-party technology partners including Axxon, Genetec, Milestone, and Qognify,* with more integrations coming in the future. Thermal temperature monitoring supports ONVIF Profiles S, G, and T, enabling the thermal camera to work with any ONVIF-supported partner.




*Customized firmwares are required to work with 3rd party partners.

Success Cases: WH Group Park, China

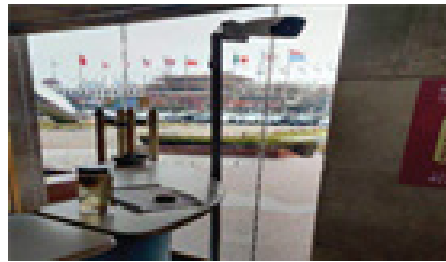

Success Cases: TCL Industrial Park, China

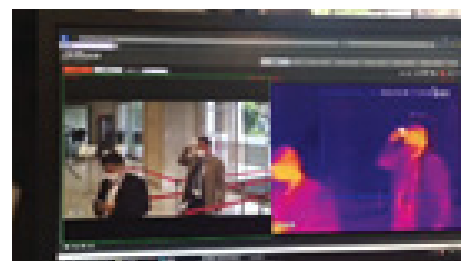

Thermal Products



DH-TPC-BF5421-T
Hybrid thermal camera



JQ-D70Z
Blackbody Temperature Calibration Device



DHI-NVR5216-16P-I 4TB
16-Channel 1 U 16 PoE NVR

Accessories



Camera PSU
DH-PFM320D-US DC12V 2A
DH-PFM321D-US DC12V 1A



RQW026-00
Connector (x2)



DHL43-F600
Monitor (x1)



VCT-999
Tripod (x2)